

住宅用雨どい Denka


個性と独創的な建物のフォームをより美しくするデザイン。




■ たてどい標準仕様

タイプ	長さ (mm)	排水有効 断面積 (cm ²)	商品色												
			H	B	SB	W	SW	K	EG	AB	SH	UB			
角たてどい	F35	2700	29.1	●	●	●	●	●	●	●	●	●	●	●	●
	K35	2700	30.3	●	●	●	●	●	●	●	●	●	●	●	●
丸たてどい	45	2700	14.6	●	●	●	●	●	●	●	●	●	●	●	●
	55	2700	22.2	●	●	●	●	●	●	●	●	●	●	●	●
	60	2700	26.4	●	●	●	●	●	●	●	●	●	●	●	●
	75	2700	41.7	●	●	●	●	●	●	●	●	●	●	●	●
	90	3600	60.7	●	●	●	●	●	●	●	●	●	●	●	●
	120	3600	110.8	●	●	●	●	●	●	●	●	●	●	●	●
高排水 たてどい	SK40	3000	—	●	●	●	●	●	●	●	●	●	●	●	●

■ 断面形状 (単位: mm)

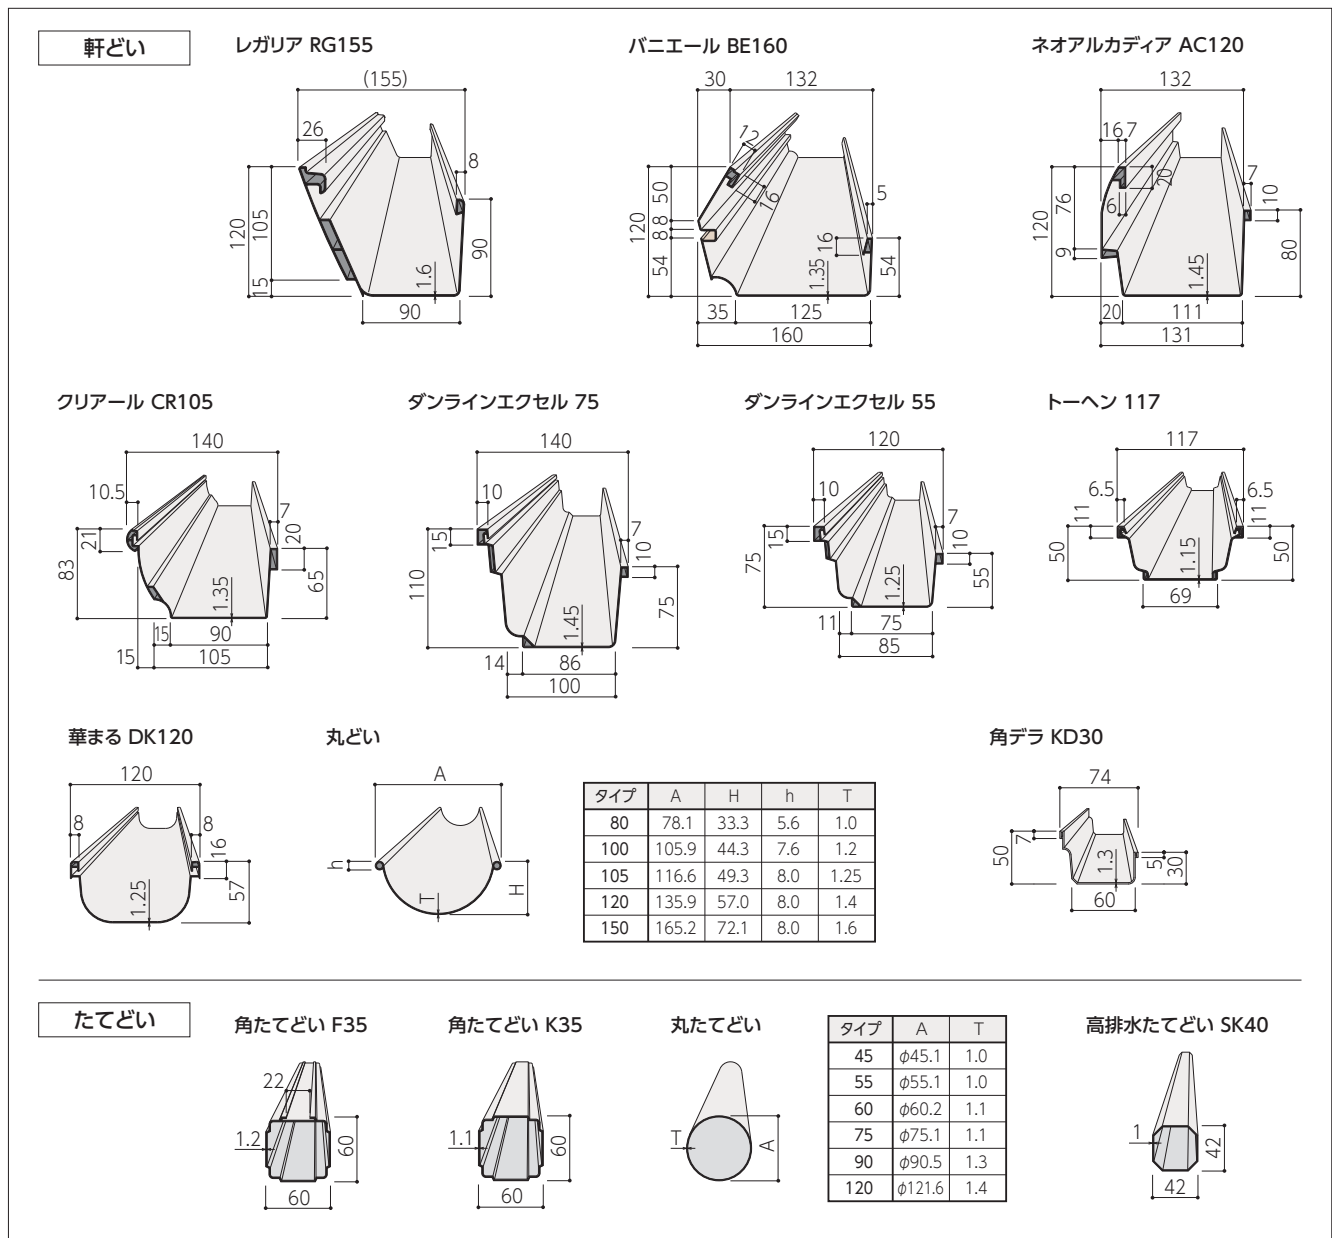

グレー
Hブラウン
B新茶
SBヨーロッパホワイト
W純白
SWクロ
Kエコグリーン
EGオートムブラウン
ABシャイニンググレー
SHアルトベージュ
UB商品色はタイプによって異なります。
詳しくは標準仕様表でご確認ください。

■ 軒どい排水能力および標準仕様

軒どい		対応たてどい	軒どい、たてどい 組み合わせによる排水能力 (ℓ/s)	落水ローケ所当たりの適合屋根投影面積 (㎡)				軒どい標準仕様														
タイプ	排水能力 (ℓ/s)	タイプ		降雨強度				長さ (mm)	排水有効 断面積 (cm ²)	商品色												
				100mm/h	120mm/h	140mm/h	160mm/h			H	B	SB	W	SW	K	EG	AB	SH	UB			
レガリア RG155	3.56	F35	2.30	82.7	60.7	52.0	45.5	3600	97.4													
		K35	2.39	86.2	63.2	54.1	47.4						●	●	●	●						
		60	2.09	75.1	55.0	47.2	41.3															
パニエール BE160	3.22	F35	1.99	71.8	59.8	51.3	44.9	3600	94.7													
		K35	2.07	74.8	62.3	53.3	46.7					●	●	●	●		●	●				
		60	1.81	65.1	54.3	46.5	40.7															
		75	2.86	102.9	85.7	73.5	64.3															
ネオアルカディア AC120	3.46	F35	2.16	77.9	64.9	55.7	48.7	3600	94.3													
		K35	2.25	81.2	67.6	58.0	50.7					●		●	●		●	●	●			
		60	1.96	70.7	58.9	50.5	44.2															
		75	3.10	111.7	93.1	79.8	69.8															
クリアール CR105	2.26	F35	1.95	70.2	58.5	50.1	43.8	3600	67.9													
		K35	2.03	73.1	60.9	52.2	45.6					●	●	●	●	●	●	●	●	●	●	
		60	1.76	63.6	53.0	45.4	39.8															
		75	2.26	81.4	67.8	58.1	50.9															
ダンラインエクセル 75	2.54	F35	2.09	75.4	62.8	53.9	47.1	3600	74.4													
		K35	2.18	78.5	65.4	56.1	49.1					●	●	●	●							
		60	1.90	68.4	57.0	48.9	42.7															
		75	2.54	91.7	76.4	65.5	57.3															
ダンラインエクセル 55	1.15	F35						3600	41.8	●		●	●	●	●							
		K35	1.15	41.4	34.5	29.6	25.9															
		60																				
		75																				
トーヘン 117	1.04	F35						3600	42.0													
		K35	1.04	37.5	31.2	26.7	23.4					●	●	●	●		●	●	●			
		60																				
華まる DK120	1.42	60	1.42	51.1	42.6	36.5	31.9	3600	53.0			●		●	●		●	●				
		75																				
丸どい	80	45	0.34	12.2	10.2	8.7	7.7	2700	16.9			●										
		55																				
	100	60	0.77	27.7	23.1	19.8	17.3	3600	30.5	●	●	●	●	●								
		75																				
	105	55	1.04	37.4	31.2	26.7	23.4	3600	37.8	●	●	●	●	●	●		●					
		60																				
	120	75	1.62	58.3	48.6	41.6	36.5	3600	51.7	●	●	●			●							
90																						
150	90	3.08	110.8	92.4	79.2	69.4	3600	81.7	●													
	120																					
角デラ KD30	0.31	45	0.31	11.3	9.4	8.1	7.0	2700	16.6			●		●	●							

● 軒どい水勾配3/1000の数値です。